

Rotary mower

Rotary mower Triplex


Type TH 2500 C - 3000 C



- Frontmounted
- Fully hydraulic driven
- Hydraulic adjustment of the cutting height
- Mechanical tilt-up as standard
- Hydraulic tilt-up as additional equipment
- 5 fixed special or Gator knives
- Large in work - small in transport

Technical data

	TH 2500 C	TH 3000 C
Largest width	2530 mm	2975 mm
Transport width	1750 mm	2000 mm
Largest length	1335 mm	1465 mm
Largest height	500 mm	500 mm
Transport height	820 mm	920 mm
Cutting width	2480 mm	2900 mm
Cutting height	30 - 80 mm	30 - 80 mm
Height adjustment	mechanical	mechanical
Mechanical tilt-up	standard	standard
Hydraulic tilt-up	extra equipment	extra equipment
Numbers of rotors	5	5
Number of special knives	5	5
Revolving airfilled rubber wheels	6 pcs. 10 x 3"	6 pcs. 10 x 3"
Need of power	25 kW / 34 HP	30 kW / 41 HP
Weight	450 kg	490 kg
Necessary flow	50 liters at 250 bar	60 liters at 250 bar
Side mowers	- independently to be tipped to vertical - declutch automatically when lifted more than 400 mm - cuts 10° below level and above level compared to the center mower	
Transmission	hydraulic by direct drive	
Drive type hydraulic TH	full hydraulic driven from the tractors hydraulic system	

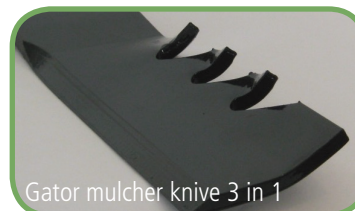

GMR maskiner a/s
Saturnvej 17 - DK 8700 Horsens

Phone +45 7564 3611
Fax +45 75645320
www.gmr.dk
stensballe@gmr.dk



Dealer: