

Rotary mower

Rotary mower Triplex


Type TH 3500 C - 4000 C



- Frontmounted
- Fully hydraulic driven
- Hydraulic adjustment of the cutting height
- Hydraulic tilt-up as standard equipment
- 7 fixed special or Gator knives
- Large in work - small in transport

Technical data

	TH 2500 C	TH 3000 C
Largest width	3530 mm	4070 mm
Transport width	1900 mm	2000 mm
Largest length	1600 mm	1700 mm
Largest height	600 mm	600 mm
Transport height	1200 mm	1450 mm
Cutting width	3470 mm	4025 mm
Cutting height	30 - 80 mm	30 - 80 mm
Height adjustment	hydraulic	hydraulic
Hydraulic tilt-up	standard	standard
Numbers of rotors	7	7
Number of special knives	7	7
Revolving airfilled rubber wheels	8	8
Need of power	37,5 kW / 51 HP	41,5 kW / 56 HP
Weight	620 kg	700 kg
Necessary flow	80 liters at 250 bar	90 liters at 300 bar
Side mowers	- independently to be tipped to vertical - declutch automatically when lifted more than 400 mm - cuts 10° below and above level compared to the center mower	
Transmission	hydraulic by direct drive	
Drive type hydraulic TH	full hydraulic driven from the tractors hydraulic system	

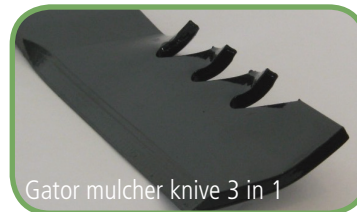

GMR maskiner a/s
Saturnvej 17 - DK 8700 Horsens

Phone +45 7564 3611
Fax +45 75645320
www.gmr.dk
stensballe@gmr.dk



Dealer: