

Rotary mower

Rotary mower Triplex

Type THM 2500 - 3000 - hydraulic/mechanical


Type TH 2500 - 3000 - hydraulic



- Frontmounted
- Mechanical adjustment of cutting height
- Mechanical tilt-up as standard
- Hydraulic tilt-up as additional equipment
- Mechanical/hydraulic or full hydraulic driven
- 5 fixed special or Gator knives
- Large in work - small in transport

Technical data

	THM / TH 2500	THM / TH 3000
Largest width	2530 mm	2975 mm
Transport width	1750 mm	2000 mm
Largest length	1335 mm	1465 mm
Largest height	500 mm	500 mm
Transport height	820 mm	920 mm
Cutting width	2480 mm	2900 mm
Cutting height	30 - 80 mm	30 - 80 mm
Height adjustment	mechanical	mechanical
Mechanical tilt-up	standard	standard
Hydraulic tilt-up	extra equipment	extra equipment
Numbers of rotors	5	5
Number of special knives	5	5
Revolving airfilled rubber wheels	6 pcs. 10 x 3"	6 pcs. 10 x 3"
Need of power	25 kW / 34 HP	30 kW / 41 HP
Weight	300 kg	425 - 450 kg
Necessary flow	50 liters at 250 bar	60 liters at 250 bar
Side mowers	- independently to be tipped to vertical - declutch automatically when lifted more than 400 mm - cuts 10° below level and 15° above level compared to the center mower	
Transmission	mechanical via V-belt drive/hydraulic via direct drive	
Drive type mechanical THM	center mower - mechanical side mower - hydraulic from tractors hydraulic system (external)	
Drive type hydraulic TH	full hydraulic driven from the tractors hydraulic system	

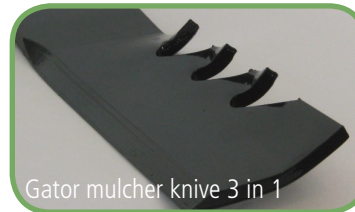

Gator mulcher knife 3 in 1

GMR

GMR maskiner a/s
Saturnvej 17 - DK 8700 Horsens

Phone +45 7564 3611
Fax +45 75645320
www.gmr.dk
stensballe@gmr.dk



Dealer: